


Cowater INAX Low Flush Toilet

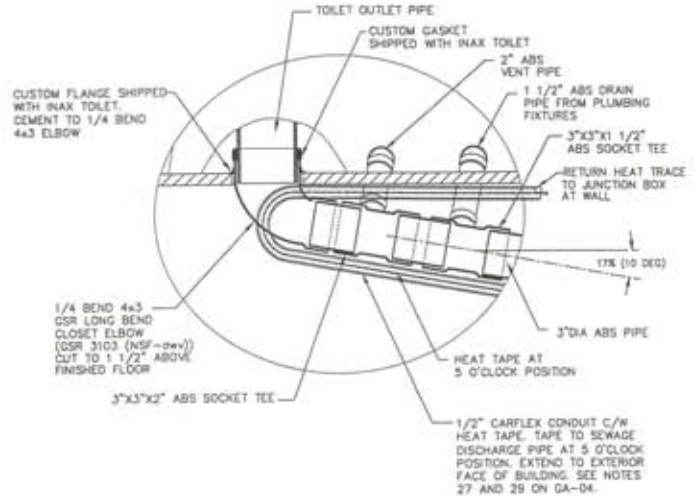

Detail of Typical Discharge Piping

Description:

INAX one pint per flush ultra low flow toilet manufactured by Toilina, Japan and available through Cowater. The toilet is designed to look like a regular household toilet with a simple to operate flushing mechanism.

Dimensions:

Seat height 15 ³/₄`, distance from wall to front toilet 27 ³/₄`, distance from wall to outlet pipe 17 ³/₄``.

Outlet Pipe:

Bend 90° 4`` x 3`` GSR #5807-2-GL Long Bend Closet Elbow (cut to 1 1/2`` above finished floor)

Specifications:

Toilet sits on 4`` sewage pipe through the floor and is fitted with a special gasket seal provided with the toilet. Flushing is by release of the flap at the base of the toilet.

Toilet is provided with two operating levers. The short lever introduces water into the bowl from the tank. The long lever releases the flap.

Volume of flush depends on amount of water introduced into the bowl.

Toilet is provided with overflow pipe in tank.

