


Cowater Transfer Tank

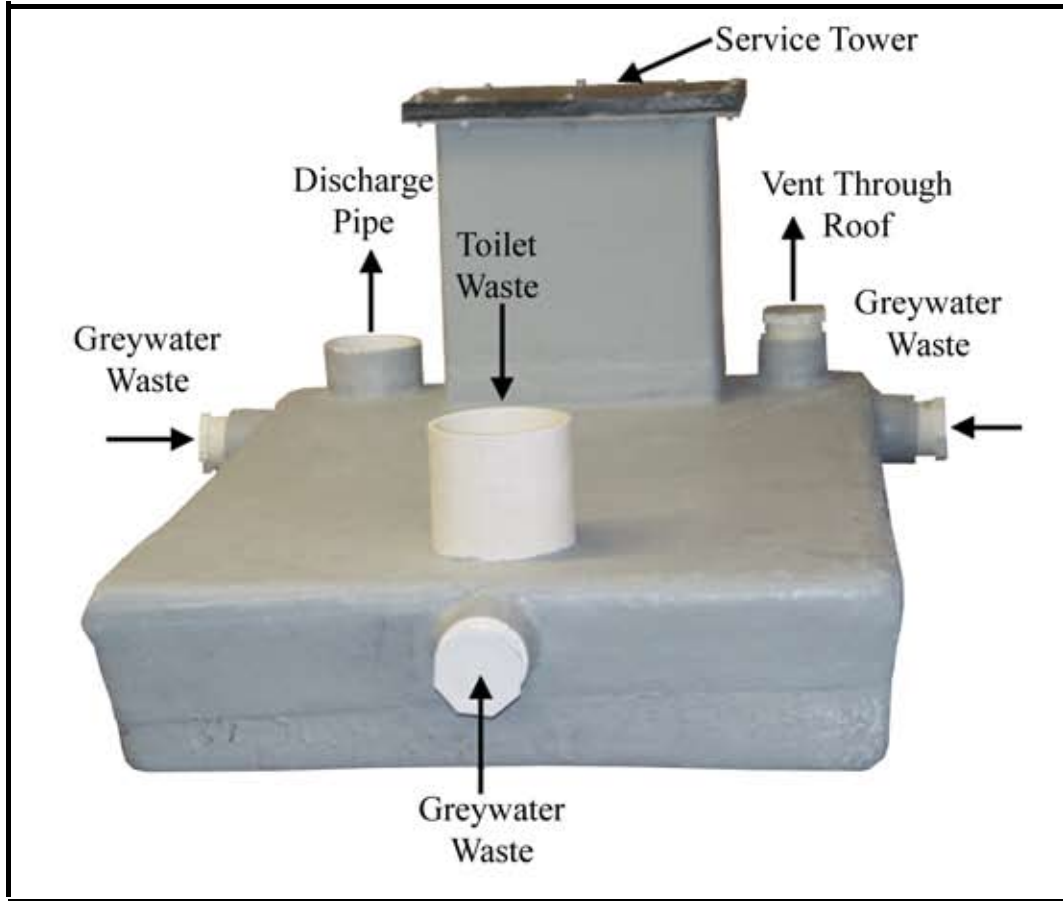

Description:

The Transfer Tank is used in Cowater's Transfer Tank System to collect sewage on a temporary basis before being transferred to the outside sewage holding tank. The Transfer Tank is installed in an 8 3/4" platform under the toilet.

Operation:

Toilet waste is discharged directly into the Transfer Tank. Greywater from sinks, tubs and showers enters through fittings on the side of the tank. The tank is vented vertically through the roof from the vent fitting. The tank is discharged by vacuum into the outside sewage holding tank. Approximately 9 to 10 gallons of sewage are transferred each cycle. The service tower at the rear of the tank holds the float switch which triggers a full light when the tank is full.

Specifications:

Material: High quality fiberglass.
Wall thickness 1/4"
Entry and Discharge pipes PVC
Entry fittings ABS

Dimensions:

Length	38"
Width	24"
Height	6 1/2"
Tower dimensions	5"x11"x13" high.